BUENOPTIC

HFB-FO-OPE Series

CANOpen to fiber optic Converter




Product Description

The HFB-FO-OPE CAN OPEN series products provide an optical point-to-point or Multidrop BUS network connection for CAN bus data interfaces on one or two, multimode or single mode optical fibers. The CAN Bus Point-to-Point Transmission units operate as the end or terminal points and provide an electrical connection and a two fiber optical connection. The units support CAN 1.0 and CAN 2.0 CAN standards ,and Device Net.and are transparent to all high level protocols. This series is available in either wall mount, DIN rail or 3U chassis card configurations

Product Features

- Up to 1Mbps data rate
- Multi mode and single mode
- Single fiber solution
- ♦ Wall mount, rack or chassis configurations
- ♦ 5 years warranty

Typical System Configuration

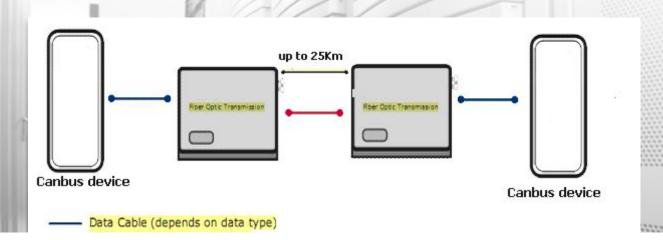



Specifications:

Data				
Data Formats	CAN1.0 ,CAN2.0 ,Device Net			
CAN Data Rate	0-1Mbps			
Bit Error Rate	<1 x 10-12			
Connectors				
Data	Screw Block Terminal			
Fiber	ST, SC or FC (ST fitted as standard)			
Environmental				
Operating	-30C+70C			
Temperature				
Storage	-30C+70C			
Temperature				
Operating Humidity	0-95%			
MTBF	>100,000 Hours			
Optical				
Fiber	Single mode or Multi Mode			
Wavelength	MM:850nm,SM:1310nm			
Number of fibers	2 or 1			
Power				
Power Input	AC 220V 110v or DC+110V,+5V,+12V,+24V,+48V Option			
Mechanical				
Dimensions	125(L)×110(W)×36(H)mm Wall Mount & DIN Rail			

Model Selection:

Model Number	Description	Fiber No.	Fiber	Fiber
			Mode	Connector
HFB-FO-OPE-P1M	Point to Point Link, Single Fiber (BI-DI),	1	Multi	ST/SC/FC
	2km		Mode	
HFB-FO-OPE-P2M	Point to Point Link,Dual Fiber, 2km	2	Multi	ST/SC/FC
			Mode	
HFB-FO-OPE-P1S	Point to Point Link,Single Fiber(BI-DI),	1	Single	ST/SC/FC
	20km		Mode	
HFB-FO-OPE-P2S	Point to Point Link, Dual Fiber, 20km	2	Single	ST/SC/FC
			Mode	
HFB-FO-OPE-M2M	Multi-drop Link,Dual Fiber(BI-DI), 2km	2	Multi	ST/SC/FC
			Mode	
HFB-FO-OPE-M4M	Multi-drop Link,4 Fiber, 2km	4	Multi	ST/SC/FC
			Mode	
HFB-FO-OPE-M2S	Multi-drop Link,Dual Fiber(BI-DI), 20km	2	Single	ST/SC/FC
			Mode	
HFB-FO-OPE-M4S	Multi-drop Link,4 Fiber, 20km	4	Single	ST/SC/FC
			Mode	